arXiv:1302.3543v1 [math.ST] 14 Feb 2013

Low-rate renewal theory and efficient estimation using censored observations

Georgios Fellouris

University of Southern California
Department of Mathematics
3620 South Vermont Ave.
KAP 416
Los Angeles, California, 90089-2532
e-mail: fellouri@usc.edu

Abstract: We consider the problem of estimating the drift of a random walk that is sampled at random times so that its increments are censored. We show that the loss of efficiency inflicted by censoring can become negligible if the sampling rate is sufficiently low. In order to do so, we extend classical renewal theorems to renewal processes with asymptotically low rates and, more generally, to random walks with asymptotically large drifts.

AMS 2000 subject classifications: Primary 62F12, 60G50; secondary 62F30, 60G40, 62N01.

Keywords and phrases: Low-rate, Random walk, Random sampling, Renewal theory, Overshoot, Variance of renewal process, Asymptotic normality.

1. Introduction

Statistical models for phenomena that evolve over time typically assume that observations arise from the discrete sampling an underlying, continuous-time stochastic process. In this setup, asymptotic results are often obtained as the sampling rate goes to infinity, i.e., as $\delta \to 0$, where δ is the (average) time between two consecutive sampling instances. Such a *high-frequency* setup has been used, for example, in order to estimate the quadratic variation of an Itô process [31]; test for the presence of jumps [1] and the degree of their activity [2] in a semimartingale; estimate the Hurst index of fractional Brownian motion [9] and other self-similar processes [27].

High-frequency sampling is a natural assumption in financial modeling (see, e.g., [13]), where tick by tick price signals are widely available. However, in other applications areas, there is, or it may be desirable to have, *infrequent* sampling. This is, for example, the case when the process of interest is being monitored at some remote location by a network of low-cost, battery-operated sensors, which transmit summaries of their data to the statistician [14]. In this context, infrequent communication leads to significant energy gains, since it allows shutting down the sensors for long time-periods, during which they only sense the environment and do not communicate their values [20]. Such applications have led to the modification of existing statistical procedures and the reformulation of classical statistical problems so that communication constraints be taken into account (see, e.g., [21], [4]).

Motivated by such applications, our goal in the present work is twofold. First, to extend some fundamental asymptotic results from renewal theory in a *low-rate* setup, i.e., as the rate of the renewal process goes to 0. Second, to argue, using both asymptotic theory and simulations, for the necessity of low-rate sampling in the prototypical statistical problem, that is the estimation of the drift of a random walk, when the random walk is sampled at a sequence of random times so that its increments are *censored*.

Censoring arises naturally in applications that involve wireless sensor networks. Indeed, such networks are typically characterized by limited bandwidth, which implies that the sensors need to transmit only *low-bit* messages (see, e.g., [6], [29]). In order to achieve this, it is typically suggested that the sensor observations be quantized, using some thresholding scheme [28]. An alternative strategy, however, is to communicate whenever the statistic of interest increases (or decreases) by a certain amount in comparison to its value at the previous communication time. In this context, censoring means ignoring the excess, or *overshoot*, of the statistic above (or below) its target level at each communication time and, consequently, allows the transmission of only *one-bit* messages from the sensors.

This kind of random sampling has been applied in different statistical problems in the context of sensor networks, such as linear state estimation [19], sequential hypothesis testing [10], sequential change detection [11], (sequential) parameter estimation [12]. In the latter work, it was assumed, for the most part, that the sensors observe *continuously* the paths of, possibly correlated, continuous-path semimartingales, an assumption which precluded loss of information due to unobserved overshoots. Discrete sampling (and the associated overshoot effect) was considered in the case that the sensors observe independent Brownian motions with common drift μ at discrete, equidistant times with common period h. In this context, it was shown that ignoring the overshoots does not imply any asymptotic loss of efficiency with respect to the estimation of μ, as long as the underlying Brownian motions are sampled at a sufficiently high rate ($h \to 0$).

In the present work, we give a much more complete answer to the more general problem of estimating the drift μ of an arbitrary random walk $(S_t)_{t\in\mathbb{N}}$ with variance σ^2, i.e., $\mathsf{E}[S_t] = \mu t$ and $\mathsf{Var}[S_t] = \sigma^2 t$. That is, the random walk is not necessarily Gaussian and does not necessarily arise from the discrete sampling of an underlying continuous-time process. (We consider a scalar process only in order to lighten the notation, all statements below can be generalized immediately to an arbitrary number of independent random walks with common drift). From the Central Limit Theorem we know that the sample mean, $\mu_t = S_t/t$, is an asymptotically normal estimator of μ, in particular,

$$\sqrt{t}(\mu_t - \mu) \to \mathcal{N}(0, \sigma^2) \quad \text{as} \quad t \to \infty. \tag{1.1}$$

Suppose now that the random walk is only observed at a sequence of random times $(\tau_n)_{n\in\mathbb{N}}$ that form a renewal process with rate $1/\delta$, i.e., $(\tau_n - \tau_{n-1})_{n\in\mathbb{N}}$ are integer-valued, i.i.d. random variables with the same distribution as $\tau := \tau_1$ and mean $\delta := \mathsf{E}[\tau]$. For any fixed sampling period δ, it is easy to see that (1.1) remains valid when we replace μ_t either by $\bar{\mu}_t := S_{\tau_{N_t}}/\tau_{N_t}$ or by $\tilde{\mu}_t := S_{\tau_{N_t}}/t$, where $N_t = \max\{n \in \mathbb{N} : \tau_n \leq t\}$ is the number of acquired samples up to time t.

In Theorem 3.1, we show that this is also the case when the sampling rate is asymptotically low, i.e., when we not only let $t \to \infty$, but also $\delta \to \infty$. More specifically, we show that if the variance of the time between two consecutive sampling instances is at most a quadratic function of the average sampling period (more precisely, if $\mathsf{Var}[\tau] = \mathcal{O}(\delta^2)$ as $\delta \to \infty$), then (1.1) remains valid as $\delta, t \to \infty$ when we replace μ_t by $\bar{\mu}_t$ (resp. $\tilde{\mu}_t$), as long as $\delta = o(t)$ (resp. $\delta = o(\sqrt{t})$). Thus, whereas the two estimators are indistinguishable in terms of their asymptotic distributions as $t \to \infty$ when δ is fixed, letting $\delta \to \infty$ reveals that $\bar{\mu}_t$ is more robust than $\tilde{\mu}_t$ to large sampling periods.

However, the main emphasis of the present paper is on the case that the increments of the random walk are censored, in the sense that (S_t) is sampled whenever it increases by a known amount $\Delta > 0$ since the previous sampling instance, i.e.,

$$\tau_n = \inf\{t \geq \tau_{n-1} : S_t - S_{\tau_{n-1}} \geq \Delta\}, \quad n \in \mathbb{N}, \tag{1.2}$$

but the overshoots $(S_{\tau_n} - S_{\tau_{n-1}} - \Delta)_{n\in\mathbb{N}}$ are unobserved. In other words, at any sampling time τ_n, we do not learn by how much more than Δ has the random walk exceeded its value at τ_{n-1}. In this context, our goal is to construct estimators that rely only on the counting process, (N_t), and yet preserve the asymptotic distribution (1.1). It turns out that this is possible only under appropriate, asymptotically *low* sampling rates.

More specifically, in Theorem 3.2 we show that (1.1) remains valid when we ignore the overshoots in $\bar{\mu}_t$ and estimate μ with $\hat{\mu}_t := (N_t \Delta)/\tau_{N_t}$, as long as $\sqrt{t} << \delta << t$. On the other hand, ignoring the overshoots in $\tilde{\mu}_t$ and estimating μ with $\breve{\mu}_t := (N_t \Delta)/t$ fails to preserve (1.1) at any sampling rate. Nevertheless, when the distribution of the random walk is known and satisfies certain conditions, we suggest a correction for the overshoots which leads to modifications of $\bar{\mu}_t$ and $\tilde{\mu}_t$ that both preserve (1.1) when $\sqrt[4]{t} << \delta << t$ and $\sqrt[4]{t} << \delta << \sqrt{t}$, respectively (Theorem 3.3). For this overshoot correction to work, we require that the average overshoot converge sufficiently fast to its limiting value as $\Delta \to \infty$ and that the latter be a Lipschitz function of μ; the second requirement, which is more restrictive, is satisfied for various distributions when the standard deviation σ is proportional to μ. Moreover, we support these findings with simulation experiments, with which we compare the above estimators in terms of their mean square errors in the context of a curved Gaussian distribution.

In order to establish these asymptotic results, we need to extend the classical renewal theorem, according to which the empirical sampling rate N_t/t converges in $\mathcal{L}^2$ to the theoretical rate $1/\delta$ as $t \to \infty$, in a low-rate setup, that is as the sampling period δ goes to infinity. We obtain such an extension, not only for the renewal process defined by (1.2), but for arbitrary renewal processes and, more generally, for random walks.

Indeed, it is well known (see Theorem 8.1 in [16]) that if (τ_n) is a random walk with positive drift δ and $\mathsf{E}[(\tau^-)^r] < \infty$ for some $r \geq 1$, then for any fixed $\delta > 0$,

$$\frac{\nu_t}{t} \to^{\mathcal{L}^r} \frac{1}{\delta} \quad \text{as} \quad t \to \infty,$$

where $\nu_t := \inf\{n \in \mathbb{N} : \tau_n > t\}$. Moreover, in the special case of renewal processes, i.e., when $\mathsf{P}(\tau > 0) = 1$, we can replace ν_t by N_t, since $\nu_t = N_t + 1$,

In Theorem 2.2, we show that this asymptotic result remains valid as $\delta \to \infty$, in the sense that

$$\frac{\delta \nu_t}{t} \to^{\mathcal{L}^r} 1 \quad \text{as} \quad \delta, t \to \infty \quad \text{so that} \quad \delta = o(t), \tag{1.3}$$

as long as $\mathsf{E}[|\tau - \delta|^{2 \vee r}] = \mathcal{O}(\delta^{2 \vee r})$ and $\mathsf{E}[(\tau^+)^{r+1}] = \mathcal{O}(\delta^{r+1})$. In the special case of renewal processes, these requirements reduce to $\mathsf{E}[\tau^{r+1}] = \mathcal{O}(\delta^{r+1})$ and are satisfied when, for example, τ is stochastically less variable than an exponential random variable, or when $\tau = \inf\{t : Y_t \geq \Delta\}$, where (Y_t) is spectrally negative Lévy process (or a random walk) so that $\mathsf{E}[Y_1] > 0$ and $\mathsf{E}[(Y_1^-)^{r+1}] < \infty$.

Moreover, although it is not needed for the estimation problem we consider in this work, we also obtain a low-rate extension of the following classical result from renewal theory (see Theorem 9.1 in [16]):

$$\frac{\mathsf{Var}[\nu_t]}{t} \to \frac{\mathsf{Var}[\tau]}{\delta^3} \quad \text{as} \quad t \to \infty,$$

which holds for any fixed δ, whenever $\mathsf{Var}[\tau] < \infty$. In Theorem 2.3, we show that this asymptotic result remains valid as $\delta \to \infty$, in the sense that

$$\frac{\delta^3}{\mathsf{Var}[\tau]} \frac{\mathsf{Var}[\nu_t]}{t} \to 1 \quad \text{as} \quad \delta, t \to \infty \quad \text{so that} \quad \delta = o(t), \tag{1.4}$$

as long as $\mathsf{Var}[\tau] = \Theta(\delta^2)$ and $\mathsf{E}[(\tau^+)^3] = \mathcal{O}(\delta^3)$.

We are not aware of extensions of renewal theorems in which the rate of the renewal process is asymptotically low or, more generally, the drift of the random walk is asymptotically large. On the contrary, in statistical problems it is usual to consider random walk with small drifts. For example, when (τ_n) is a random walk so that the distribution of τ can be embedded in a natural exponential family, Siegmund [23] (see also [24], Chapter 10) computed the limiting value of $\mathsf{E}[(\tau_{\nu_t} - t)^r]$ as $\delta \to 0$ and $t \to \infty$ so that $\delta t = \mathcal{O}(1)$ in order to obtain corrected diffusion approximations to the operating characteristics of the Sequential Probability Ratio Test. (For more refined corrected diffusion approximations, we refer to [7], [8], [5]).

The rest of the paper is organized as follows: in Section 2, we assume that (τ_n) is a random walk and establish (1.3) and (1.4). In Section 3, we consider the estimation of the drift of a random walk (S_t) that is observed at an arbitrary renewal process (τ_n) and, in particular, when (τ_n) is given by (1.2) and censoring is present. We conclude in Section 4.

2. Low-rate renewal theory

Let $(\tau_n)_{n\in\mathbb{N}}$ be a random walk with positive drift, i.e., let $(\tau_n - \tau_{n-1})_{n\in\mathbb{N}}$ be a sequence of i.i.d. random variables with mean $\delta := \mathsf{E}[\tau] > 0$, where $\tau := \tau_1$, and consider the first-passage time process

$$\nu_t := \inf\{n \in \mathbb{N} : \tau_n > t\}, \quad t > 0. \tag{2.1}$$

When (τ_n) is a renewal process, i.e., $\mathsf{P}(\tau > 0) = 1$, $\nu_t = N_t + 1$, where (N_t) is the corresponding renewal counting process,

$$N_t := \max\{n \in \mathbb{N}^* : \tau_n \leq t\}, \quad t \in \mathbb{N}. \tag{2.2}$$

For any $t > 0$, ν_t is a stopping time with respect to the filtration generated by (τ_n), thus,

$$\tau_{\nu_t} - \delta\nu_t = \sum_{n=1}^{\nu_t} (\tau_n - \tau_{n-1} - \delta)$$

is a *stopped* random walk with drift zero. Thus, from Wald's first and second identity we have

$$\mathsf{E}[\tau_{\nu_t}] = \mathsf{E}[\nu_t]\,\delta, \quad \mathsf{Var}[\tau_{\nu_t} - \delta\nu_t] = \mathsf{E}[(\tau_{\nu_t} - \delta\nu_t)^2] = \mathsf{E}[\nu_t]\mathsf{Var}[\tau], \tag{2.3}$$

whereas from the stopped versions of the Marcinkiewicz-Zygmund inequalities (see [16], Theorem 5.1, page 22) it follows that for any $r \geq 2$:

$$\mathsf{E}[(\tau_{\nu_t} - \delta\nu_t)^r] \leq c_r\,\mathsf{E}[\nu_t^{r/2}]\,\mathsf{E}[|\tau - \delta|^r], \tag{2.4}$$

where by c_r we represent a generic, positive constant that depends on r.

Moreover, from Lorden [17] we have the following bound on the expectation of the residual lifetime/excess/overshoot, $\tau_{\nu_t} - t$:

$$\mathsf{E}[\tau_{\nu_t} - t] \leq \frac{\mathsf{E}[(\tau^+)^2]}{\delta} \tag{2.5}$$

and, more generally, for any $r \geq 1$ we have:

$$\mathsf{E}[(\tau_{\nu_t} - t)^r] \leq c_r\,\frac{\mathsf{E}[(\tau^+)^{r+1}]}{\delta}. \tag{2.6}$$

We will also use the following algebraic inequality, which holds for any $r \geq 1$,

$$|x - y|^r \leq c_r\,(x^r + y^r), \quad x, y > 0. \tag{2.7}$$

2.1. A low-rate renewal theorem

We first establish (1.3) when $r = 1$.

Theorem 2.1. *If* $\mathsf{Var}[\tau] = \mathcal{O}(\delta^2)$ *and* $\mathsf{E}[(\tau^+)^2] = \mathcal{O}(\delta^2)$, *then*

$$\frac{\delta\nu_t}{t} \to^{\mathcal{L}^1} 1 \quad \text{as} \quad \delta, t \to \infty \quad \text{so that} \quad \delta = o(t).$$

Proof. Let us first observe that

$$\Big|\frac{\delta\nu_t}{t} - 1\Big| \leq \frac{|\delta\nu_t - \tau_{\nu_t}|}{t} + \frac{\tau_{\nu_t} - t}{t}. \tag{2.8}$$

From (2.5) and the assumption that $\mathsf{E}[(\tau^+)^2] = \mathcal{O}(\delta^2)$ it follows that

$$\frac{\mathsf{E}[\tau_{\nu_t} - t]}{t} \leq \frac{\mathsf{E}[(\tau^+)^2]}{\delta\, t} = \frac{\mathcal{O}(\delta^2)}{\delta\, t} = \mathcal{O}\Big(\frac{\delta}{t}\Big). \tag{2.9}$$

Moreover, starting with an application of Hölder's inequality we have

$$\begin{aligned}\frac{\mathsf{E}[|\delta\nu_t-\tau_{\nu_t}|]}{t} &\leq \sqrt{\frac{\mathsf{E}[(\delta\nu_t-\tau_{\nu_t})^2]}{t^2}} = \sqrt{\frac{\mathsf{E}[\nu_t]\mathsf{Var}[\tau]}{t^2}} = \sqrt{\frac{\mathsf{E}[\tau_{\nu_t}]}{t}\,\frac{\mathsf{Var}[\tau]}{\delta\, t}} \\ &= \sqrt{\left(1+\mathcal{O}\left(\frac{\delta}{t}\right)\right)\frac{\mathcal{O}(\delta^2)}{\delta t}} = \mathcal{O}\left(\sqrt{\frac{\delta}{t}}\right), \qquad (2.10)\end{aligned}$$

where the first two equalities follow from Wald's identities (2.3), whereas the third equality follows from (2.9) and the assumption that $\mathsf{Var}[\tau]=\mathcal{O}(\delta^2)$. Taking expectations in (2.8) and applying (2.9) and (2.10) completes the proof. □

Using Theorem 2.1, we will now establish (1.3) for arbitrary $r \geq 1$. In order to do so, we will need the following condition

$$\text{(C)} \qquad \mathsf{E}[|\tau-\delta|^{r\vee 2}]=\mathcal{O}(\delta^{r\vee 2}) \;\text{ and }\; \mathsf{E}[(\tau^+)^{r+1}]=\mathcal{O}(\delta^{r+1}),$$

which reduces to the assumptions of Theorem 2.1 when $r=1$. Moreover, as we show in the following lemma, if condition (C) holds for some $r \geq 1$, then it remains valid for any $s \in [0,r]$.

Lemma 2.1. *If condition (C) holds, then*

$$\begin{aligned}\mathsf{E}[(\tau^+)^s] &= \mathcal{O}(\delta^s), \quad \forall s \in [0, r+1], \\ \mathsf{E}[|\tau-\delta|^s] &= \mathcal{O}(\delta^s), \quad \forall s \in [0, r\vee 2].\end{aligned}$$

Proof. We will only prove the first claim, since the second can be shown in a similar way. Thus, from Hölder's inequality and condition (C) it follows that for any $s \in [0,r+1]$

$$\mathsf{E}[(\tau^+)^s] \leq (\mathsf{E}[(\tau^+)^{r+1}])^{\frac{s}{r+1}} = (\mathcal{O}(\delta^{r+1}))^{\frac{s}{r+1}} = \mathcal{O}(\delta^s),$$

which completes the proof. □

Finally, for any $r \geq 1$ we will use the following notation

$$\mathsf{E}[|\tau-\delta|^r]=\Theta(\delta^{q_r}), \quad \alpha_r := 2\frac{q_{r\vee 2}}{r\vee 2}-1, \qquad (2.11)$$

where q_r is some positive number. Condition (C) implies that $q_{r\vee 2} \leq r\vee 2$ and consequently $\alpha_r \leq 1$. However, we will see that the exact value of $q_{r\vee 2}$, and in particular α_r, determines the rate of convergence in (1.3).

Theorem 2.2. *Let $r \geq 1$. If condition (C) holds, then*

$$\mathsf{E}\left[\left|\frac{\delta\nu_t}{t}-1\right|^r\right] = \mathcal{O}\left(\frac{\delta}{t}\right)^r + \mathcal{O}\left(\frac{\delta^{\alpha_r}}{t}\right)^{\frac{r}{2}} \qquad (2.12)$$

and, consequently,

$$\frac{\delta\nu_t}{t} \to^{\mathcal{L}^r} 1 \quad \textit{as} \quad \delta, t\to\infty \quad \textit{so that} \quad \delta=o(t).$$

Proof of Theorem 2.2. Due to condition (C), $\alpha_r \leq 1$, thus it suffices to prove (2.12). Applying the algebraic inequality (2.8) to (2.7) and taking expectations we have

$$\mathsf{E}\Big[\Big|\frac{\delta\nu_t}{t}-1\Big|^r\Big] \leq c_r\Big(\frac{\mathsf{E}[|\delta\nu_t-\tau_{\nu_t}|^r]}{t^r}+\frac{\mathsf{E}[(\tau_{\nu_t}-t)^r]}{t^r}\Big). \tag{2.13}$$

From (2.5) and condition (C) it follows that

$$\frac{\mathsf{E}[(\tau_{\nu_t}-t)^r]}{t^r} \leq c_r\,\frac{\mathsf{E}[(\tau^+)^{r+1}]}{\delta\, t^r} = \frac{\mathcal{O}(\delta^{r+1})}{\delta\, t^r} = \mathcal{O}\Big(\frac{\delta^r}{t^r}\Big). \tag{2.14}$$

From an application of Hölder's inequality and (2.4) it follows that

$$\begin{aligned}
\mathsf{E}[|\delta\nu_t-\tau_{\nu_t}|^r] &\leq \mathsf{E}[|\delta\nu_t-\tau_{\nu_t}|^{r\vee 2}]^{\frac{r}{r\vee 2}} \\
&\leq c_r\left(\mathsf{E}[\nu_t^{\frac{r\vee 2}{2}}]\,\mathsf{E}[|\tau-\delta|^{r\vee 2}]\right)^{\frac{r}{r\vee 2}} \\
&= c_r\,\mathsf{E}\Big[\nu_t^{\frac{r\vee 2}{2}}\Big]^{\frac{r}{r\vee 2}}\,\mathsf{E}\Big[|\tau-\delta|^{r\vee 2}\Big]^{\frac{r}{r\vee 2}}
\end{aligned}$$

and, consequently,

$$\begin{aligned}
\frac{\mathsf{E}[|\delta\nu_t-\tau_{\nu_t}|^r]}{t^r} &\leq c_r\,\mathsf{E}\Big[\Big(\frac{\delta\nu_t}{t}\Big)^{\frac{r\vee 2}{2}}\Big]^{\frac{r}{r\vee 2}}\;\frac{\mathsf{E}[|\tau-\delta|^{r\vee 2}]^{\frac{r}{r\vee 2}}}{(\delta t)^{\frac{r}{2}}} \\
&= \mathsf{E}\Big[\Big(\frac{\delta\nu_t}{t}\Big)^{\frac{r\vee 2}{2}}\Big]^{\frac{r}{r\vee 2}}\;\mathcal{O}\Big(\frac{\delta^{a_r}}{t}\Big)^{\frac{r}{2}},
\end{aligned} \tag{2.15}$$

where the equality follows from (2.11). Thus, from (2.13)-(2.15) we obtain

$$\mathsf{E}\Big[\Big|\frac{\delta\nu_t}{t}-1\Big|^r\Big] \leq \mathcal{O}\Big(\frac{\delta}{t}\Big)^r + \mathsf{E}\Big[\Big(\frac{\delta\nu_t}{t}\Big)^{\frac{r\vee 2}{2}}\Big]^{\frac{r}{r\vee 2}}\;\mathcal{O}\Big(\frac{\delta^{a_r}}{t}\Big)^{\frac{r}{2}}.$$

When $1 \leq r \leq 2$, from Theorem 2.1 we have

$$\mathsf{E}\Big[\Big(\frac{\delta\nu_t}{t}\Big)^{\frac{r\vee 2}{2}}\Big] = \mathsf{E}\Big[\frac{\delta\nu_t}{t}\Big] \to 1 \quad \text{as} \quad \delta, t \to \infty \quad \text{so that} \quad \delta = o(t).$$

Indeed, from Lemma 2.1 it follows that condition (C) holds for $r = 1$, in which case it reduces to the assumptions of Theorem 2.1. Therefore, (2.12) holds when $1 \leq r \leq 2$.

When $2 \leq r \leq 4$, it suffices to show that

$$\mathsf{E}\Big[\Big(\frac{\delta\nu_t}{t}\Big)^{\frac{r\vee 2}{2}}\Big] = \mathsf{E}\Big[\Big(\frac{\delta\nu_t}{t}\Big)^{\frac{r}{2}}\Big] \to 1 \quad \text{as} \quad \delta, t \to \infty \quad \text{so that} \quad \delta = o(t).$$

Indeed, from Lemma 2.1 we know that condition (C) holds when r is replaced by $r/2$ and we just proved that the Theorem holds for $r/2 \in (1, 2)$, which proves (2.12) for $2 \leq r \leq 4$. The theorem can be shown in a similar way for any $4 \leq r \leq 8$, etc. □

Remarks:

1. When $q_{r\vee 2} = r \vee 2$, then $\alpha_r = 1$ and, consequently,
$$\mathsf{E}\Big[\Big|\frac{\delta N_t}{t} - 1\Big|^r\Big] = \mathcal{O}\Big(\frac{\delta}{t}\Big)^{\frac{r}{2}}.$$
2. When $q_{r\vee 2} = \frac{r\vee 2}{2}$, then $\alpha_r = 0$ and, consequently,
$$\mathsf{E}\Big[\Big|\frac{\delta N_t}{t} - 1\Big|^r\Big] = \mathcal{O}\Big(\frac{\delta}{t}\Big)^{r}.$$

2.2. The case of renewal processes

When (τ_n) is a renewal process, i.e., $\mathsf{P}(\tau > 0) = 1$, condition (C) reduces to $\mathsf{E}[\tau^{r+1}] = \mathcal{O}(\delta^{r+1})$. Indeed, for any $r \geq 1$ we can write
$$\mathsf{E}[|\tau - \delta|^{r\vee 2}] \leq \mathsf{E}[\tau^{r\vee 2}] \leq \mathsf{E}[\tau^{r+1}]^{\frac{r\vee 2}{r+1}} = \mathcal{O}(\delta^{r+1})^{\frac{r\vee 2}{r+1}} = \mathcal{O}(\delta^{r\vee 2}),$$
where the first inequality is due to $\mathsf{P}(\tau > 0) = 1$ and the second one follows from Hölder's inequality and the fact that $r \vee 2 \leq r + 1$. Using this observation, we now specialize Theorem 2.2 to renewal processes.

Corollary 2.1. *Let $r \geq 1$ and suppose that (τ_n) is a renewal process, i.e., $\mathsf{P}(\tau > 0) = 1$. If $\mathsf{E}[\tau^{r+1}] = \mathcal{O}(\delta^{r+1})$, then*
$$\mathsf{E}\Big[\Big|\frac{\delta N_t}{t} - 1\Big|^r\Big] = \mathcal{O}\Big(\frac{\delta}{t}\Big)^{r} + \mathcal{O}\Big(\frac{\delta^{a_r}}{t}\Big)^{\frac{r}{2}} \tag{2.16}$$
and, consequently,
$$\frac{\delta N_t}{t} \to^{\mathcal{L}^r} 1 \quad \text{as} \quad t, \delta \to \infty \quad \text{such that} \quad \delta = o(t).$$
When, in particular, $q_{r\vee 2} = r \vee 2$,
$$\mathsf{E}\Big[\Big|\frac{\delta N_t}{t} - 1\Big|^r\Big] = \mathcal{O}\Big(\frac{\delta}{t}\Big)^{\frac{r}{2}},$$
whereas when $q_{r\vee 2} = \frac{r\vee 2}{2}$,
$$\mathsf{E}\Big[\Big|\frac{\delta N_t}{t} - 1\Big|^r\Big] = \mathcal{O}\Big(\frac{\delta}{t}\Big)^{r}.$$

Proof. When $\mathsf{P}(\tau > 0) = 1$, it is $\nu_t = N_t + 1$, thus,
$$\Big|\frac{\delta N_t}{t} - 1\Big| \leq \Big|\frac{\delta \nu_t}{t} - 1\Big| + \frac{\delta}{t}.$$
Applying (2.7) and taking expectations we obtain
$$\mathsf{E}\Big[\Big|\frac{\delta N_t}{t} - 1\Big|^r\Big] \leq c_r\,\Big(\mathsf{E}\Big[\Big|\frac{\delta \nu_t}{t} - 1\Big|^r\Big] + \Big(\frac{\delta}{t}\Big)^r\Big). \tag{2.17}$$
Applying now Theorem 2.2 completes the proof. ∎

Remarks:

1. The condition of Corollary 2.1 is satisfied when τ is positive and *stochastically less variable* than an exponential random variable σ with mean δ, i.e., $\mathsf{E}[g(\tau)] \leq \mathsf{E}[g(\sigma)]$ for every convex and increasing function $g : (0, \infty) \to (0, \infty)$. This is, for example, the case when τ is *new better than used in expectation*, i.e., $\mathsf{E}[\tau - t | \tau > t] \leq \mathsf{E}[\tau] \; \forall \, t$ (see, e.g., [22], pp. 435-437).

Indeed, if we denote by $\lceil r \rceil$ the ceiling of r, i.e., $\lceil r \rceil := \min\{n \in \mathbb{N} : n \geq r\}$, then

$$\mathsf{E}[\tau^{r+1}] \leq \mathsf{E}[\sigma^{r+1}] \leq \mathsf{E}[\sigma^{\lceil r+1 \rceil}]^{\frac{r+1}{\lceil r+1 \rceil}} = c_r \, \delta^{r+1},$$

where the first inequality holds because $x \to x^{r+1}$ is a convex and increasing function on $(0, \infty)$, the second inequality follows from an application of Hölder's inequality and the last step follows from the fact $\mathsf{E}[\sigma^n] = \delta^n / n!$ for any $n \in \mathbb{N}$.

2. Let (Y_t) be a spectrally negative Lévy process, i.e., a stochastic process with stationary and independent increments and without positive jumps, so that $\mathsf{E}[Y_t] = \mu \, t$ and $\mathsf{E}[(Y_1^-)^{r+1}] < \infty$. Then, Corollary 2.1 also applies to the first hitting times of Y, i.e., when $\tau = \inf\{t : Y_t \geq \Delta\}$, where $\Delta > 0$ and $\mu > 0$.

Indeed, from Wald's identity it follows that $\delta = \mathsf{E}[\tau] = \Delta / \mu$, whereas from Theorem 4.2 in [15] we have

$$\mathsf{E}[\tau^{r+1}] = (\Delta/\mu)^{r+1} (1 + o(1)) \quad \text{as} \quad \Delta \to \infty. \tag{2.18}$$

Note that δ goes to infinity if either $\Delta \to \infty$ or $\mu \to 0$. Thinking of (τ_n) as sampling times of (Y_t), it is natural to consider μ as fixed and to assume that the sampling period δ is controlled by threshold Δ. This implies that $\mathsf{E}[\tau^{r+1}] = \Theta(\delta^{r+1})$ as $\delta \to \infty$ and proves that the condition of Corollary 2.1 is satisfied in this case as well.

3. The previous remark still holds if Y is a random walk, a case we consider in more detail in the next section.

2.3. The variance for random walks with large drift

We close this section establishing (1.4).

Theorem 2.3. *If* $\mathsf{Var}[\tau] = \Theta(\delta^2)$ *and* $\mathsf{E}[(\tau^+)^3] = \mathcal{O}(\delta^3)$*, then*

$$\frac{\delta^3}{\mathsf{Var}[\tau]} \frac{\mathsf{Var}[\nu_t]}{t} \to 1 \quad \textit{as} \quad \delta, t \to \infty \quad \textit{so that} \quad \delta = o(t).$$

Proof of Theorem 2.3. First of all, we observe that

$$\begin{aligned}\delta^2 \operatorname{Var}[\nu_t] &= \operatorname{Var}[\delta\nu_t - t] = \operatorname{Var}[\delta\nu_t - \tau_{\nu_t} + \tau_{\nu_t} - t] \\ &= \operatorname{Var}[\delta\nu_t - \tau_{\nu_t}] + \operatorname{Var}[\tau_{\nu_t} - t] + 2\operatorname{Cov}(\delta\nu_t - \tau_{\nu_t}, \tau_{\nu_t} - t) \\ &= \operatorname{Var}[\tau]\, \mathsf{E}[\nu_t] + \operatorname{Var}[\tau_{\nu_t} - t] + 2\,\mathsf{E}[(\delta\nu_t - \tau_{\nu_t})(\tau_{\nu_t} - t)],\end{aligned}$$

where the last equality follows from (2.3). Now, multiplying both sides by $\delta/(\operatorname{Var}[\tau]\, t)$ we obtain

$$\frac{\delta^3 \operatorname{Var}[\nu_t]}{\operatorname{Var}[\tau]\, t} = \frac{\delta\, \mathsf{E}[\nu_t]}{t} + \frac{\delta \operatorname{Var}[\tau_{\nu_t} - t]}{\operatorname{Var}[\tau]\, t} + 2\frac{\delta\, \mathsf{E}[(\delta\nu_t - \tau_{\nu_t})(\tau_{\nu_t} - t)]}{\operatorname{Var}[\tau]\, t}. \tag{2.19}$$

From Theorem 2.1 it follows that $\delta\, \mathsf{E}[\nu_t] = t(1 + o(1))$, therefore it suffices to show that the second and third term in the right-hand side of (2.19) go to 0. Indeed, for the second term we observe that

$$\frac{\delta \operatorname{Var}[\tau_{\nu_t} - t]}{\operatorname{Var}[\tau]\, t} \leq \frac{\delta\, \mathsf{E}[(\tau_{\nu_t} - t)^2]}{\operatorname{Var}[\tau]\, t} \leq c_2 \frac{\mathsf{E}[(\tau^+)^3]}{\operatorname{Var}[\tau]\, t} = \frac{\mathcal{O}(\delta^3)}{\Theta(\delta^2)\, t} = \mathcal{O}\Big(\frac{\delta}{t}\Big),$$

where the second inequality follows from an application of (2.6) with $r = 2$ and the first equality from the assumptions of the theorem. Regarding the third term in (2.19), from an application of the Cauchy-Schwartz inequality we have

$$\begin{aligned}\mathsf{E}[|\delta\nu_t - \tau_{\nu_t}|(\tau_{\nu_t} - t)] &\leq \sqrt{\mathsf{E}[(\delta\nu_t - \tau_{\nu_t})^2]\; \mathsf{E}[(\tau_{\nu_t} - t)^2]} \\ &\leq \sqrt{c_2 \frac{\mathsf{E}[\nu_t] \operatorname{Var}[\tau]\; \mathsf{E}[(\tau^+)^3]}{\delta}},\end{aligned}$$

where the second inequality follows from (2.3) and (2.6). Consequently,

$$\begin{aligned}\frac{\delta\, \mathsf{E}[|\delta\nu_t - \tau_{\nu_t}|(\tau_{\nu_t} - t)]}{\operatorname{Var}[\tau]\, t} &\leq \frac{\delta}{\operatorname{Var}[\tau]\, t} \sqrt{c_2 \frac{\mathsf{E}[\nu_t] \operatorname{Var}[\tau]\; \mathsf{E}[(\tau^+)^3]}{\delta}} \\ &= \sqrt{c_2 \frac{\delta\, \mathsf{E}[\nu_t]}{t} \; \frac{\mathsf{E}[(\tau^+)^3]}{\operatorname{Var}[\tau]\, t}} \leq \sqrt{\frac{\mathcal{O}(\delta^3)}{\Theta(\delta^2) t}} = \mathcal{O}\Big(\sqrt{\frac{\delta}{t}}\Big),\end{aligned}$$

where the second inequality follows from the assumptions of the theorem. This completes the proof. □

We now specialize Theorem 2.3 to the case of renewal processes.

Corollary 2.2. *Suppose that* $\mathsf{P}(\tau > 0) = 1$. *If* $\operatorname{Var}[\tau] = \Theta(\delta^2)$ *and* $\mathsf{E}[\tau^3] = \mathcal{O}(\delta^3)$, *then*

$$\frac{\delta^3}{\operatorname{Var}[\tau]} \frac{\operatorname{Var}[N_t]}{t} \to 1 \quad \textit{as} \quad \delta, t \to \infty \quad \textit{so that} \quad \delta = o(t).$$

3. Low-rate parameter estimation

Let $(X_t)_{t\in\mathbb{N}}$ be a sequence of i.i.d. random variables with non-lattice distribution, mean $\mu := \mathsf{E}[X]$, and variance $\sigma^2 := \mathsf{Var}[X] < \infty$, where $X := X_1$. From the Central Limit Theorem we know that the sample mean is an asymptotically normal estimator of μ, i.e.,

$$\sqrt{t}(\mu_t - \mu) \to \mathcal{N}(0, \sigma^2) \quad \text{as} \quad t \to \infty, \tag{3.1}$$

where $S_t := X_1 + \ldots + X_t$ and $\mu_t := S_t/t$. Our goal in this section is to construct estimators of μ that preserve this asymptotic distribution when the random walk (S_t) is only observed at a sequence of sampling times $(\tau_n)_{n\in\mathbb{N}}$ that form a renewal process with rate $1/\delta$. Therefore, in what follows, $(\tau_n - \tau_{n-1})_{n\in\mathbb{N}}$ is a sequence of positive, integer-valued, i.i.d. random variables with mean $\delta := \mathsf{E}[\tau] > 0$, where $\tau := \tau_1$. Moreover, we will use the notation introduced in (2.1) and (2.2) and denote by N_t the number of acquired samples up to time t and by $\nu_t = N_t + 1$ the first hitting time of level t.

In this context, two natural modifications of μ_t are

$$\bar{\mu}_t := S_{\tau_{N_t}}/\tau_{N_t}, \quad \tilde{\mu}_t := S_{\tau_{N_t}}/t, \quad t \in \mathbb{N}. \tag{3.2}$$

That is, $\bar{\mu}_t$ is the sample mean evaluated at the most recent sampling time, whereas in $\tilde{\mu}_t$ we have replaced the most recent sampling time in the denominator by the current time t. Note that $(\tilde{\mu}_t)$ coincides with $(\bar{\mu}_t)$ at the sampling times, but takes smaller values in between.

In order to describe the asymptotic behavior of both these estimators as $\delta, t \to \infty$, we will need Lorden's upper bound on the expectation of the age, or undershoot, $t - \tau_{N_t}$:

$$\mathsf{E}[t - \tau_{N_t}] \leq \frac{\mathsf{E}[\tau^2]}{\delta} = \delta + \frac{\mathsf{Var}[\tau]}{\delta}, \tag{3.3}$$

which is valid since $\mathsf{P}(\tau > 0) = 1$ (see [17], page 526). Indeed, the following lemma, which will play an important role in the sequel, is a direct consequence of this bound.

Lemma 3.1. *If* $\mathsf{Var}[\tau] = \mathcal{O}(\delta^2)$, *then*

$$\frac{\tau_{N_t}}{t} \to^{\mathcal{L}^1} 1 \quad \textit{as} \quad \delta, t \to \infty \quad \textit{so that} \quad \delta = o(t).$$

Proof. From (3.3) and the assumption of the lemma it follows that $\mathsf{E}[t - \tau_{N_t}] = \mathcal{O}(\delta)$ as $\delta, t \to \infty$ and, consequently, it is clear that

$$\mathsf{E}\Big[\Big|\frac{\tau_{N_t}}{t} - 1\Big|\Big] = \frac{\mathsf{E}[t - \tau_{N_t}]}{t} = \mathcal{O}\Big(\frac{\delta}{t}\Big),$$

which completes the proof. □

3.1. Complete observations at arbitrary sampling times

The following theorem provides sufficient conditions on the distribution of τ so that $\bar{\mu}_t$ and $\tilde{\mu}_t$ have the same asymptotic distribution as μ_t when $\delta, t \to \infty$.

Theorem 3.1. *If* $\mathsf{Var}[\tau] = \mathcal{O}(\delta^2)$, *then*

$$\begin{aligned} &(i)\ \sqrt{t}(\bar{\mu}_t - \mu) \to \mathcal{N}(0, \sigma^2) \quad \textit{as} \quad \delta, t \to \infty \quad \textit{so that} \quad \delta = o(t), \\ &(ii)\ \sqrt{t}(\tilde{\mu}_t - \mu) \to \mathcal{N}(0, \sigma^2) \quad \textit{as} \quad \delta, t \to \infty \quad \textit{so that} \quad \delta = o(\sqrt{t}). \end{aligned}$$

Proof. From Lemma 3.1 it follows that τ_{N_t}/t converges to 1 in probability as $\delta, t \to \infty$ so that $\delta = o(t)$. As a result, from (3.1) and Anscombe's theorem (see, e.g., [16], page 17) we obtain (i). Then, in order to prove (ii), from Slutsky's theorem it follows that it suffices to show that

$$\sqrt{t}|\bar{\mu}_t - \tilde{\mu}_t| = \sqrt{t}|S_{\tau_{N_t}}| \frac{t - \tau_{N_t}}{t\, \tau_{N_t}} = |\bar{\mu}_t| \frac{t - \tau_{N_t}}{\sqrt{t}} \tag{3.4}$$

converges to 0 in probability as $\delta, t \to \infty$ so that $\delta = o(\sqrt{t})$. Indeed, from the Strong Law of Large Numbers and Lemma 3.1 it follows that $\bar{\mu}_t$ converges to μ in probability as $\delta, t \to \infty$ so that $\delta = o(t)$ (see, e.g., Theorem 2.2 in [16], page 12). Moreover, from (3.3) and the assumption of the Theorem it follows that

$$\frac{\mathsf{E}[t - \tau_{N_t}]}{\sqrt{t}} = \mathcal{O}\Big(\frac{\delta}{\sqrt{t}}\Big),$$

which implies that $(t - \tau_{N_t})/\sqrt{t}$ converges to 0 in probability as $\delta, t \to \infty$ so that $\delta = o(\sqrt{t})$ and completes the proof. ☐

Remarks:

1. The proof of Theorem 3.1 remains valid when δ is fixed as $t \to \infty$. Thus, Theorem 3.1 suggests that whereas both estimators $\bar{\mu}_t$ and $\tilde{\mu}_t$ are efficient for small or moderate δ, only $\bar{\mu}_t$ will remain efficient for large sampling periods.

2. When sampling at any given time t has probability p and is independent of the past, then τ is geometrically distributed with mean $\delta = 1/p$ and variance

$$\mathsf{Var}[\tau] = \frac{1-p}{p^2} = \delta^2(1 - \delta^{-1}),$$

thus, the condition of Theorem 3.1 is clearly satisfied in this case.

3. When the random walk has positive drift and is sampled whenever it increases by a fixed amount Δ since the previous sampling instance, i.e.,

$$\tau_n := \inf\{t \geq \tau_{n-1} : S_t - S_{\tau_{n-1}} \geq \Delta\}, \quad n \in \mathbb{N}, \tag{3.5}$$

then $\tau = \inf\{t : S_t \geq \Delta\}$ and

$$\delta = \frac{\Delta}{\mu} + \mathcal{O}(1) \text{ and } \mathsf{Var}[\tau] = \frac{\sigma^2}{\mu^3}\,\Delta\Big(1 + o(1)\Big) \quad \text{as} \quad \Delta \to \infty, \tag{3.6}$$

(see, e.g., Theorem 9.1 in [16]). Therefore, assuming that the sampling period δ is controlled by Δ, we have $\mathsf{Var}[\tau] = \Theta(\delta)$ as $\delta \to \infty$, which implies that the condition of Theorem 3.1 is satisfied in this case as well.

4. When the sign of μ is not known in advance and the random walk is sampled whenever it either increases or decreases by Δ since the previous sampling instance, i.e.,

$$\tau_n := \inf\{t \geq \tau_{n-1} : |S_t - S_{\tau_{n-1}}| \geq \Delta\}, \quad n \in \mathbb{N}, \tag{3.7}$$

then (3.6) still holds if μ is replaced by $|\mu|$ (see [18]) and, consequently, Theorem 3.1 applies to this case as well.

3.2. Censored observations

We now focus on the case that the random walk has positive drift and the sampling times are given by (3.5), but the overshoots

$$\eta_n := S_{\tau_n} - S_{\tau_{n-1}} - \Delta, \quad n \in \mathbb{N},$$

are *unobserved*. In other words, we do not learn by how much more than Δ has the random walk increased since the previous sampling instance.

In this context, the estimators defined in (3.8),

$$\mu_{\tau_{N_t}} = \frac{1}{\tau_{N_t}} \sum_{n=1}^{N_t} \Big[\Delta + \eta_n\Big], \quad \tilde{\mu}_t = \frac{1}{t} \sum_{n=1}^{N_t} \Big[\Delta + \eta_n\Big], \qquad t \in \mathbb{N}, \tag{3.8}$$

are no longer applicable. Our goal in the remainder of this section is to find estimators that rely only on the counting process (N_t) and still preserve the asymptotic distribution (3.1).

3.2.1. Ignoring the overshoots

If we simply ignore the unobserved overshoots, the estimators in (3.8) reduce to

$$\hat{\mu}_t := \frac{N_t\,\Delta}{\tau_{N_t}}, \quad \check{\mu}_t := \frac{N_t\,\Delta}{t}, \quad t \in \mathbb{N}. \tag{3.9}$$

In order to describe their asymptotic behavior as $\delta, t \to \infty$, we need the following lemma, which relies on the low-rate renewal theorem that we established in the previous section. Moreover, in what follows, we set $\eta := \eta_1$ (similarly to $\tau = \tau_1$ and $X = X_1$).

Lemma 3.2. *$\mathsf{E}[\eta]=\mathcal{O}(1)$ as $\Delta\to\infty$ and*

$$\mathsf{E}\Big[\Big|\frac{\delta N_t}{t}-1\Big|\Big]=\mathcal{O}\Big(\frac{\delta}{t}\Big) \quad \text{and} \quad \mathsf{E}[N_t]=\Big(\frac{t}{\delta}\Big)\Big(1+o(1)\Big)$$

as $\delta,t\to\infty$ so that $\delta=o(t)$.

Proof. The first claim of the lemma follows from the assumption that X has a finite second moment (see, e.g., Theorem 10.9 in [16]). Moreover, from (3.6) we have $\mathsf{Var}[\tau]=\Theta(\delta)$, thus, $q_2=1$ and $\alpha_2=0$ and the second claim of the lemma follows from Corollary 2.1. □

Theorem 3.2. *(i) If $\delta,t\to\infty$ so that $\delta=o(t)$, then*

$$\mathsf{E}[|\check{\mu}_t-\mu|]=\mathcal{O}\Big(\frac{\delta}{t}\Big)+\mathcal{O}\Big(\frac{1}{\delta}\Big).$$

(ii) If $\delta,t\to\infty$ so that $\sqrt{t}<<\delta<<t$, i.e., $\delta=o(t)$ and $\sqrt{t}=o(\delta)$, then

$$\sqrt{t}(\hat{\mu}_t-\mu)\to\mathcal{N}(0,\sigma^2).$$

Proof. From Wald's identity and the fact that $(\eta_n)_{n\in\mathbb{N}}$ is a sequence of i.i.d. random variables, it is clear that $\delta\mu=\Delta+\mathsf{E}[\eta]$, therefore

$$\begin{aligned}|\check{\mu}_t-\mu|&=\Big|\Delta\frac{N_t}{t}-\mu\Big|=\Big|\Big(\delta\mu-\mathsf{E}[\eta]\Big)\,\frac{N_t}{t}-\mu\Big|\\&=\Big|\mu\Big(\frac{\delta N_t}{t}-1\Big)-\mathsf{E}[\eta]\frac{N_t}{t}\Big|\leq\mu\Big|\frac{\delta N_t}{t}-1\Big|+\mathsf{E}[\eta]\frac{N_t}{t}.\end{aligned} \tag{3.10}$$

Taking expectations and applying Lemma 3.2 we obtain (i).

From Theorem 3.1(i) we know that $\sqrt{t}(\bar{\mu}_t-\mu)\to\mathcal{N}(0,\sigma^2)$ as $\delta,t\to\infty$ so that $\delta=o(t)$, thus, it suffices to show that

$$\sqrt{t}|\mu_t-\hat{\mu}_t|=\frac{\sqrt{t}}{\tau_{N_t}}\sum_{n=1}^{N_t}\eta_n=\frac{t}{\tau_{N_t}}\,\frac{1}{\sqrt{t}}\sum_{n=1}^{N_t}\eta_n$$

converges to 0 in probability as $\delta,t\to\infty$ so that $\sqrt{t}<<\delta<<t$. Indeed, from Lemma 3.1 it follows that t/τ_{N_t} converges to 1 in probability as $\delta,t\to\infty$ so that $\delta=o(t)$. On the other hand,

$$\frac{1}{\sqrt{t}}\mathsf{E}\Big[\sum_{n=1}^{N_t}\eta_n\Big]\leq\frac{1}{\sqrt{t}}\mathsf{E}\Big[\sum_{n=1}^{\nu_t}\eta_n\Big]=\frac{\mathsf{E}[\nu_t]\mathsf{E}[\eta]}{\sqrt{t}}=\mathcal{O}\Big(\frac{\sqrt{t}}{\delta}\Big),$$

where the inequality is due to $\nu_t=N_t+1$, the first equality follows from an application of Wald's first identity and the second equality follows from Lemma 3.2. □

Remarks:

1. The proof of Theorem 3.2 remains valid, with obvious modifications, when the sign of μ is unknown and (3.5) is replaced by the two-sided sampling scheme (3.7).

2. Theorem 3.2(ii) suggests that even if censoring is completely ignored, the inflicted performance loss can be negligible, as long as we use the last sampling time τ_{N_t} in the denominator, instead of t, and the sampling rate is sufficiently low, i.e., $\delta >> \sqrt{t}$ (compare this with the case of complete observations in Theorem 3.1, where only an *upper* bound was imposed on the speed at which $\delta \to \infty$).

3. Theorem 3.2(i) implies that $\check{\mu}_t$ is a (weakly) consistent estimator of μ as $\delta, t \to \infty$ so that $\delta = o(t)$. Moreover, since

$$\sqrt{t}\, \mathsf{E}[|\check{\mu}_t - \mu|] = \mathcal{O}\Big(\frac{\delta}{\sqrt{t}}\Big) + \mathcal{O}\Big(\frac{\sqrt{t}}{\delta}\Big),$$

it is clear that the best sampling rate for $\check{\mu}_t$ is given by $\delta = \Theta(\sqrt{t})$. However, even in this case, $\check{\mu}_t$ fails to preserve the asymptotic distribution (3.1) of μ_t.

4. Using similar ideas as in Section 4.2 of [12], it can be shown that ignoring the overshoots incurs no loss efficiency for the estimation of the drift of a Brownian motion, when the latter is sampled at discrete times but with high frequency. More specifically, in our notation, suppose that $\mathsf{E}[X] = \mu h$ and $\mathsf{Var}[X] = \sigma^2 h$, where $h > 0$ is the period at which the underlying Brownian motion is being sampled. Then it can be shown that $\sqrt{t}(\check{\mu}_t - \mu) \to \mathcal{N}(0, \sigma^2)$ as $\delta, t \to \infty$ and $h \to 0$ so that $\sqrt[3]{h} = o(\delta/\sqrt{t})$, whereas this asymptotic distribution remains valid even if δ is fixed.

In the next subsection, we do not make this restrictive assumption and improve upon $\check{\mu}_t$ *approximating* the unobserved overshoots.

3.2.2. Approximating the overshoots

Assuming now that we know the distribution of the random walk, we construct modifications of $\bar{\mu}_t$ and $\tilde{\mu}_t$ that rely on approximations of the unobserved overshoots. More specifically, the main idea of the proposed approximation is to replace each η_n in (3.8) by its expectation, $\mathsf{E}[\eta]$. However, since the latter is typically an intractable quantity, we use the *limiting average overshoot* instead. Indeed, it is well known from classical renewal theory (see, e.g., [24], page 171) that, since X is non-lattice and has a finite first moment, η converges in distribution as $\Delta \to \infty$ to a random variable ξ whose density with respect to the

Lebesgue measure is

$$\mathsf{P}(\xi \in dx) := \frac{\mathsf{P}(S_{\tau_+} > x)}{\mathsf{E}[S_{\tau_+}]}\, dx, \quad x > 0,$$

where $\tau_+ := \inf\{t \in \mathbb{N} : S_t > 0\}$ is the first ascending ladder time. Moreover, since X has a finite second moment, the limiting value of the expected overshoot $\mathsf{E}[\eta]$ as $\Delta \to \infty$ is finite and admits the following representation:

$$\rho(\mu) := \lim_{\Delta \to \infty} \mathsf{E}[\eta] = \mathsf{E}[\xi] = \frac{\mathsf{E}[S_{\tau_+}^2]}{2\,\mathsf{E}[S_{\tau_+}]}. \tag{3.11}$$

We have expressed the limiting average overshoot as a function of μ in order to emphasize that it depends on the unknown parameter, μ, thus it cannot be used directly to approximate the unobserved overshoots. However, we can obtain a working approximation of $\rho(\mu)$ if we replace μ with an estimator that does not require knowledge of the distribution of X, such as $\check{\mu}_t$ or $\hat{\mu}_t$. Doing so, we obtain the following estimators of μ:

$$\begin{aligned} \frac{1}{t} \sum_{n=1}^{N_t} \Big[\Delta + \rho(\check{\mu}_t)\Big] &= \frac{N_t\,(\Delta + \rho(\check{\mu}_t))}{t} =: g(\check{\mu}_t) \\ \frac{1}{\tau_{N_t}} \sum_{n=1}^{N_t} \Big[\Delta + \rho(\hat{\mu}_t)\Big] &= \frac{N_t\,(\Delta + \rho(\hat{\mu}_t))}{\tau_{N_t}} =: g(\hat{\mu}_t), \end{aligned} \tag{3.12}$$

where the real function g is defined as follows

$$g(x) := x\left(1 + \frac{\rho(x)}{\Delta}\right), \quad x > 0,$$

and the term in the parenthesis reflects the overshoot correction. We will show that, unlike $\check{\mu}_t$, $g(\check{\mu}_t)$ preserves the asymptotic distribution (3.1) of μ_t, whereas $g(\hat{\mu}_t)$ attains it for a wider range of sampling rates than $\hat{\mu}_t$. However, for this, we need to impose some additional conditions on the distribution of X that will guarantee that:

(i) $\delta N_t/t$ converges to 1 as $\delta, t \to \infty$ so that $\delta = o(t)$ *in* $\mathcal{L}^2$,
(ii) the overshoot η is *square integrable*, i.e., $\mathsf{E}[\eta^2] = \mathcal{O}(1)$ as $\Delta \to \infty$,
(iii) the expected overshoot $\mathsf{E}[\eta]$ converges sufficiently fast to its limiting value, in the sense that $|\mathsf{E}[\eta] - \rho(\mu)| = \mathcal{O}(1/\Delta)$ as $\Delta \to \infty$.

We will see that the first two requirements are both satisfied when the following condition holds

(A1) $\mathsf{E}[|X|^{r+1}] < \infty$ for some $r \geq 2$, i.e., when the *third* moment of X is finite. For the third requirement, we will rely on the refinements of the renewal theorem due to Stone (see [25], [26]) and assume additionally that

(A2) X is strongly non-lattice, i.e., $\liminf_{|\theta|\to\infty} |1-\mathsf{E}[e^{i\theta X}]| > 0$,

and

(A3) either X takes only positive values, i.e., $\mathsf{P}(X>0)=1$, or it has an exponentially decaying right tail, i.e., $\mathsf{P}(X>x)=o(e^{-\theta_1 x})$ as $x\to\infty$ for some $\theta_1>0$.

Indeed, from [25] we know that if $(A1)$ and $(A2)$ hold, then

$$\Big|U^+(\Delta)-\frac{\Delta}{\mu}-\frac{\rho(\mu)}{\mu}\Big| = o\Big(\frac{1}{\Delta^{r-1}}\Big), \tag{3.13}$$

whereas from [26] it follows that if additionally X has an exponentially decaying right tail, then

$$\Big|U^+(\Delta)-\frac{\Delta}{\mu}-\frac{\rho(\mu)}{\mu}\Big| = o(e^{-\theta_2\Delta}) \quad \text{as} \quad \Delta\to\infty \tag{3.14}$$

for some $\theta_2>0$, where $U^+(\Delta)$ is the renewal function and $(\tau_{n,+})_{n\in\mathbb{N}}$ the sequence of ascending ladder heights, i.e.,

$$U^+(\Delta) := \sum_{n=0}^{\infty} \mathsf{P}(S_{\tau_{n,+}} \leq \Delta), \qquad \tau_{n,+} := \inf\{t\geq \tau_{n-1,+} : S_t > S_{\tau_{n-1,+}}\}.$$

Lemma 3.3. *(i) If* $\mathsf{E}[(X^+)^3]<\infty$, *then* $\mathsf{E}[\eta^2]=\mathcal{O}(1)$ *as* $\Delta\to\infty$.

(ii) If $\mathsf{E}[(X^-)^3]<\infty$, *then as* $\delta, t\to\infty$ *so that* $\delta=o(t)$

$$\mathsf{E}\Big[\Big|\frac{\delta N_t}{t}-1\Big|^2\Big] = \mathcal{O}\Big(\frac{\delta}{t}\Big)^2 \quad \textit{and} \quad \mathsf{E}[N_t^2] = \Big(\frac{t}{\delta}\Big)^2\Big(1+o(1)\Big).$$

(iii) If $(A1)-(A3)$ *hold, then* $|\mathsf{E}[\eta]-\rho(\mu)| = o(\Delta^{-(r-1)})$ *as* $\Delta\to\infty$.

Proof. For (i), we refer to Theorem 10.9 in [16]. From Theorem 8.1 in [16] it follows that if $\mathsf{E}[(X^-)^3]<\infty$, then $\mathsf{E}[\tau^3]=\mathcal{O}(\delta^3)$, whereas from (3.6) we know that $\mathsf{Var}[\tau]=\Theta(\delta)$, thus $q_2=1$ and $\alpha_2=0$. Therefore, from Corollary 2.1 we obtain (ii). For (iii), we first observe that

$$|\mathsf{E}[\eta]-\rho(\mu)| = |\mathsf{E}[S_\tau-\Delta]-\rho(\mu)| = \mu\Big|\mathsf{E}[\tau]-\frac{\Delta}{\mu}-\frac{\rho(\mu)}{\mu}\Big|, \tag{3.15}$$

where the second equality follows from an application of Wald's identity. When $\mathsf{P}(X>0)=1$, then $\mathsf{E}[\tau]=U^+(\Delta)$, in which case (iii) follows from (3.13).

When X has an exponentially decaying right tail, using (3.14) and the following representation of the expected overshoot

$$\mathsf{E}[\eta] = \int_0^\infty (1 - \mathsf{P}(S_{\tau+} > \Delta + y - x))\, U^+(dx),$$

we can show (similarly to [7]) that $|\mathsf{E}[\eta] - \rho(\mu)|$ decays exponentially fast as $\Delta \to \infty$, which implies the desired result. □

Theorem 3.3. *If* (A1) − (A3) *hold and* $\mu \to \rho(\mu)$ *is Lipschitz, then*

(i) $\sqrt{t}(g(\check{\mu}_t) - \mu) \to \mathcal{N}(0, \sigma^2)$ *as* $\delta, t \to \infty$ *so that* $t^{1/4} << \delta << \sqrt{t}$*,*
(ii) $\sqrt{t}(g(\hat{\mu}_t) - \mu) \to \mathcal{N}(0, \sigma^2)$ *as* $\delta, t \to \infty$ *so that* $t^{1/4} << \delta << t$*.*

Proof. (i) From Theorem 3.1(ii) we know that $\sqrt{t}(\tilde{\mu}_t - \mu) \to \mathcal{N}(0, \sigma^2)$ as $\delta, t \to \infty$ so that $\delta = o(\sqrt{t})$. Therefore, due to Slutsky's theorem, it suffices to show that $\sqrt{t}\,|\tilde{\mu}_t - g(\check{\mu}_t)|$ converges to 0 in probability as $\delta, t \to \infty$ so that $t^{1/4} << \delta << t$.

In particular, since

$$\begin{aligned}\sqrt{t}\,|\tilde{\mu}_t - g(\check{\mu}_t)| &= \frac{1}{\sqrt{t}} \Big| \sum_{n=1}^{N_t} \Big(\eta_n - \rho(\check{\mu}_t)\Big) \Big| \\ &\leq \frac{1}{\sqrt{t}} \Big| \sum_{n=1}^{N_t} \Big(\eta_n - \mathsf{E}[\eta]\Big) \Big| + \frac{N_t\, |\mathsf{E}[\eta] - \rho(\mu)|}{\sqrt{t}} + \frac{N_t\, |\rho(\check{\mu}_t) - \rho(\mu)|}{\sqrt{t}},\end{aligned} \tag{3.16}$$

it suffices to show that each term in (3.16) converges to 0 in probability when $t^{1/4} << \delta << t$. We start with the first term and we observe that, since $\nu_t = N_t + 1$, using the triangle inequality we can write

$$\Big| \sum_{n=1}^{N_t} \Big(\eta_n - \mathsf{E}[\eta]\Big) \Big| \leq \Big| \sum_{n=1}^{\nu_t} \Big(\eta_n - \mathsf{E}[\eta]\Big) \Big| + |\eta_{\nu_t} - \mathsf{E}[\eta]|.$$

Taking expectations and applying the Cauchy-Schwartz inequality to both terms of the right-hand side we obtain

$$\begin{aligned}\mathsf{E}\Big[\Big| \sum_{n=1}^{\nu_t} \Big(\eta_n - \mathsf{E}[\eta]\Big) \Big|\Big] &\leq \sqrt{\mathsf{Var}\Big[\sum_{n=1}^{\nu_t} \Big(\eta_n - \mathsf{E}[\eta]\Big)\Big]} + \sqrt{\mathsf{E}\Big[(\eta_{\nu_t} - \mathsf{E}[\eta])^2\Big]} \\ &\leq \sqrt{\mathsf{Var}\Big[\sum_{n=1}^{\nu_t} \Big(\eta_n - \mathsf{E}[\eta]\Big)\Big]} + \sqrt{\mathsf{E}\Big[\sum_{n=1}^{\nu_t} \Big(\eta_n - \mathsf{E}[\eta]\Big)^2\Big]} \\ &= \sqrt{\mathsf{E}[\nu_t]\mathsf{Var}[\eta]} + \sqrt{\mathsf{E}[\nu_t]\mathsf{Var}[\eta]},\end{aligned}$$

where the second inequality is trivial and the equality follows from an application of Wald's identities. Consequently, from Lemmas 3.2 and 3.3 we obtain:

$$\frac{1}{\sqrt{t}}\,\mathsf{E}\Big[\Big|\sum_{n=1}^{\nu_t}\Big(\eta_n-\mathsf{E}[\eta]\Big)\Big|\Big]\leq 2\sqrt{\frac{\mathsf{Var}[\eta]}{\delta}}\,\sqrt{\frac{\delta\,\mathsf{E}[\nu_t]}{t}}=\mathcal{O}\Big(\frac{1}{\sqrt{\delta}}\Big). \tag{3.17}$$

Regarding the second term in (3.16), from Lemma 3.3(iii) and the fact that $\delta=\Theta(\Delta)$ it follows that $|\mathsf{E}[\eta]-\rho(\mu)|=o(1/\delta)$ as $\delta\to\infty$. From this observation and Lemma 3.2 we obtain:

$$\frac{\mathsf{E}[N_t]\,|\mathsf{E}[\eta]-\rho(\mu)|}{\sqrt{t}}=\frac{\delta\,\mathsf{E}[N_t]}{t}\,\frac{\sqrt{t}}{\delta}\,|\mathsf{E}[\eta]-\rho(\mu)|=o\Big(\frac{\sqrt{t}}{\delta^2}\Big). \tag{3.18}$$

Regarding the last term in (3.16), from the assumption that $\mu\to\rho(\mu)$ is Lipschitz, there is a constant $C>0$ so that

$$\frac{N_t\,|\rho(\check{\mu}_t)-\rho(\mu)|}{\sqrt{t}}\leq C\,\frac{N_t\,|\check{\mu}_t-\mu|}{\sqrt{t}}\leq C\,\frac{N_t}{\sqrt{t}}\,\Big|\frac{\delta N_t}{t}-1\Big|+C\,\mathsf{E}[\eta]\,\frac{N_t^2}{t^{3/2}},$$

where the second inequality follows from (3.10). Then, taking expectations and applying the Cauchy-Schwartz inequality in the first term we obtain

$$\begin{aligned}\mathsf{E}\Big[\frac{N_t\,|\rho(\check{\mu}_t)-\rho(\mu)|}{\sqrt{t}}\Big]&\leq C\,\sqrt{\frac{\mathsf{E}[N_t^2]}{t}\,\mathsf{E}\Big[\Big|\frac{\delta N_t}{t}-1\Big|^2\Big]}+C\,\frac{\mathsf{E}[N_t^2]}{t^{3/2}}\\&=\mathcal{O}\Big(\frac{1}{\sqrt{t}}\Big)+\mathcal{O}\Big(\frac{\sqrt{t}}{\delta^2}\Big)=\mathcal{O}\Big(\frac{\sqrt{t}}{\delta^2}\Big),\end{aligned} \tag{3.19}$$

where the first equality follows from Lemma 3.3(ii).

From (3.16), (3.17), (3.18) and (3.19) we obtain

$$\sqrt{t}\,|\tilde{\mu}_t-g(\check{\mu}_t)|=\frac{1}{\sqrt{t}}\,\mathsf{E}\Big[\Big|\sum_{n=1}^{N_t}\Big(\eta_n-\rho(\check{\mu}_t)\Big)\Big|\Big]=\mathcal{O}\Big(\frac{\sqrt{t}}{\delta^2}\Big), \tag{3.20}$$

which completes the proof of (i).

(ii) According to Theorem 2.2, $\sqrt{t}(\bar{\mu}_t-\mu)\to\mathcal{N}(0,\sigma^2)$ as $\delta,t\to\infty$ so that $\delta=o(t)$, therefore it suffices to show that $\sqrt{t}|\bar{\mu}_t-g(\hat{\mu}_t)|$ converges to 0 in probability as $\delta,t\to\infty$ so that $t^{1/4}<<\delta<<t$. Since

$$\begin{aligned}\sqrt{t}|\bar{\mu}_t-g(\hat{\mu}_t)|&=\frac{\sqrt{t}}{\tau_{N_t}}\,\Big|\sum_{n=1}^{N_t}\Big(\eta_n-\rho(\hat{\mu}_t)\Big)\Big|=\frac{t}{\tau_{N_t}}\,\frac{1}{\sqrt{t}}\Big|\sum_{n=1}^{N_t}\Big(\eta_n-\rho(\hat{\mu}_t)\Big)\Big|\\&\leq\frac{t}{\tau_{N_t}}\,\Big[\frac{1}{\sqrt{t}}\Big|\sum_{n=1}^{N_t}\Big(\eta_n-\rho(\check{\mu}_t)\Big)\Big|+\frac{N_t\,|\rho(\hat{\mu}_t)-\rho(\check{\mu}_t)|}{\sqrt{t}}\Big],\end{aligned} \tag{3.21}$$

from Lemma 3.1 and (3.20) it is clear that it suffices to show that the second term in (3.21) converges to 0 in probability as $\delta, t \to \infty$ so that $\delta = o(t)$. Indeed, due to the assumption that $\mu \to \rho(\mu)$ is Lipschitz, we have

$$\frac{N_t \, |\rho(\hat{\mu}_t) - \rho(\check{\mu}_t)|}{\sqrt{t}} \leq C \, \frac{N_t}{\sqrt{t}} \left| \frac{\Delta \, N_t}{\tau_{N_t}} - \frac{\Delta \, N_t}{t} \right| = C \frac{\Delta}{\delta} \, \frac{t}{\tau_{N_t}} \left(\frac{\delta N_t}{t} \right)^2 \frac{t - \tau_{N_t}}{\delta \sqrt{t}}.$$

From Lemma 3.1 and Lemma 3.3(ii) it follows that the right-hand side converges to 0 in probability as $\delta, t \to \infty$ so that $\delta = o(t)$, which completes the proof. □

Remarks:

1. When $\mathsf{P}(X > 0) = 1$ and $\sigma^2 = c\mu^2$ for some $c > 0$, then $\rho(\mu)$ is a linear function of μ. Indeed, from (3.11) it follows that

$$\rho(\mu) = \frac{\mathsf{E}[X^2]}{\mathsf{E}[X]} = \frac{\sigma^2 + \mu^2}{2\mu} = \frac{1+c}{2} \, \mu.$$

For example, if X follows the Gamma distribution with shape parameter $k > 0$ and rate parameter $\lambda > 0$, then $\sigma^2 = \mu^2/k$ and $\rho(\mu)$ is proportional to μ for any given k.

2. When $\mathsf{P}(X > 0) < 1$, $\rho(\mu)$ does not typically admit a convenient closed-form expression in terms of μ. An exception is the Gaussian distribution, in which case (3.11) takes the following form

$$\rho(\mu) = \frac{\mu^2 + \sigma^2}{2\mu} - \sigma \sum_{n=1}^{\infty} \frac{\phi(b_n) - b_n \, \Phi(-b_n)}{\sqrt{n}} \,, \quad b_n := \frac{\mu \sqrt{n}}{\sigma},$$

(see [30], page 34), where $\Phi(\cdot)$ and $\phi(\cdot)$ are the c.d.f. and p.d.f. respectively of the standard normal distribution. In this case as well, if $\sigma^2 = c\mu^2$ for some $c > 0$, then $b_n = \sqrt{n/c}$ and consequently $\rho(\mu) = w_c \, \mu$, where

$$w_c := \frac{1+c}{2} - \sum_{n=1}^{\infty} \frac{\phi(\sqrt{n/c}) - \sqrt{n/c} \, \Phi(-\sqrt{n/c})}{\sqrt{n/c}}.$$

3.3. Summary and simulation experiments

In Table 1, we present the estimators of μ that we considered in the context of the sampling scheme (3.5). For each estimator, we report whether it needs the overshoots (η_n) to be observed or not, whether it uses the sampling times (τ_n) or only the counting process (N_t), whether it assumes knowledge of the distribution of X. Moreover, we specify the sampling rates at which its performance is optimized.

In Figure 3.3 we plot the relative efficiency of each estimator as a function of the sampling period, δ, for a fixed horizon of observations, $t = 300$, when $X \sim \mathcal{N}(\mu, c\mu^2)$ and $c = \mu = 4$. More specifically, we define the relative efficiency of $\bar{\mu}_t$ (similarly for the other estimators) as

$$RE(\bar{\mu}_t) = \frac{\mathsf{E}[(\bar{\mu}_t - \mu)^2]}{\mathsf{E}[(\mu_t - \mu)^2]} = \frac{\mathsf{E}[(\bar{\mu}_t - \mu)^2]}{\sigma^2/t}$$

and we compute it using simulation experiments. This figure offers some very interesting observations which are in complete accordance with our asymptotic results.

First of all, we observe that $\bar{\mu}_t$, $\hat{\mu}_t$ and $g(\hat{\mu}_t)$ are more efficient than $\tilde{\mu}_t$, $\check{\mu}_t$ and $g(\check{\mu}_t)$ respectively for *any* δ and especially for large values of δ. Thus, it is always preferable to use τ_{N_t} in the denominator, instead of t, especially when one is interested in large sampling periods, irrespectively of whether the overshoots are observed or not.

Moreover, we see that for $\bar{\mu}_t$ and $\tilde{\mu}_t$, the smaller the sampling rate, the better the performance; for $\hat{\mu}_t$ and $g(\hat{\mu}_t)$, performance deteriorates for small δ and remains flat (and quite high) as δ increases; for $\check{\mu}_t$ and $g(\check{\mu}_t)$, performance is optimized when δ is in a particular range and deteriorates for both very small and very large values of δ. Therefore, when the random walk is fully observed at the sampling times, it is preferable to have a high sampling rate, whereas when there is censoring and τ_{N_t} (resp. t) is used in the denominator, the sampling rate should be low (resp. somewhere in the middle).

Finally, we observe that $g(\check{\mu}_t)$ is more efficient than $\check{\mu}_t$ *uniformly over* δ, whereas its performance attains its optimum over a much wider range for δ. On the other hand, $g(\hat{\mu}_t)$ is more efficient than $\hat{\mu}_t$ only for small δ. For very large values of δ, $\hat{\mu}_t$ turns out to be more efficient even than $\bar{\mu}_t$. Therefore, when using τ_{N_t} (resp. t) in the denominator, approximating the overshoots is beneficial for high sampling rates (resp. for any sampling rate and especially for very low sampling rates).

4. Conclusions

In the present work, we extended some fundamental renewal-theoretic results for renewal processes whose rates go to 0 and, more generally, for random walk whose drifts go to infinity. These extensions can be useful in a variety of setups in which recurrent events do not occur frequently. In the present work, they were motivated by the estimation of the drift of a random walk that is sampled

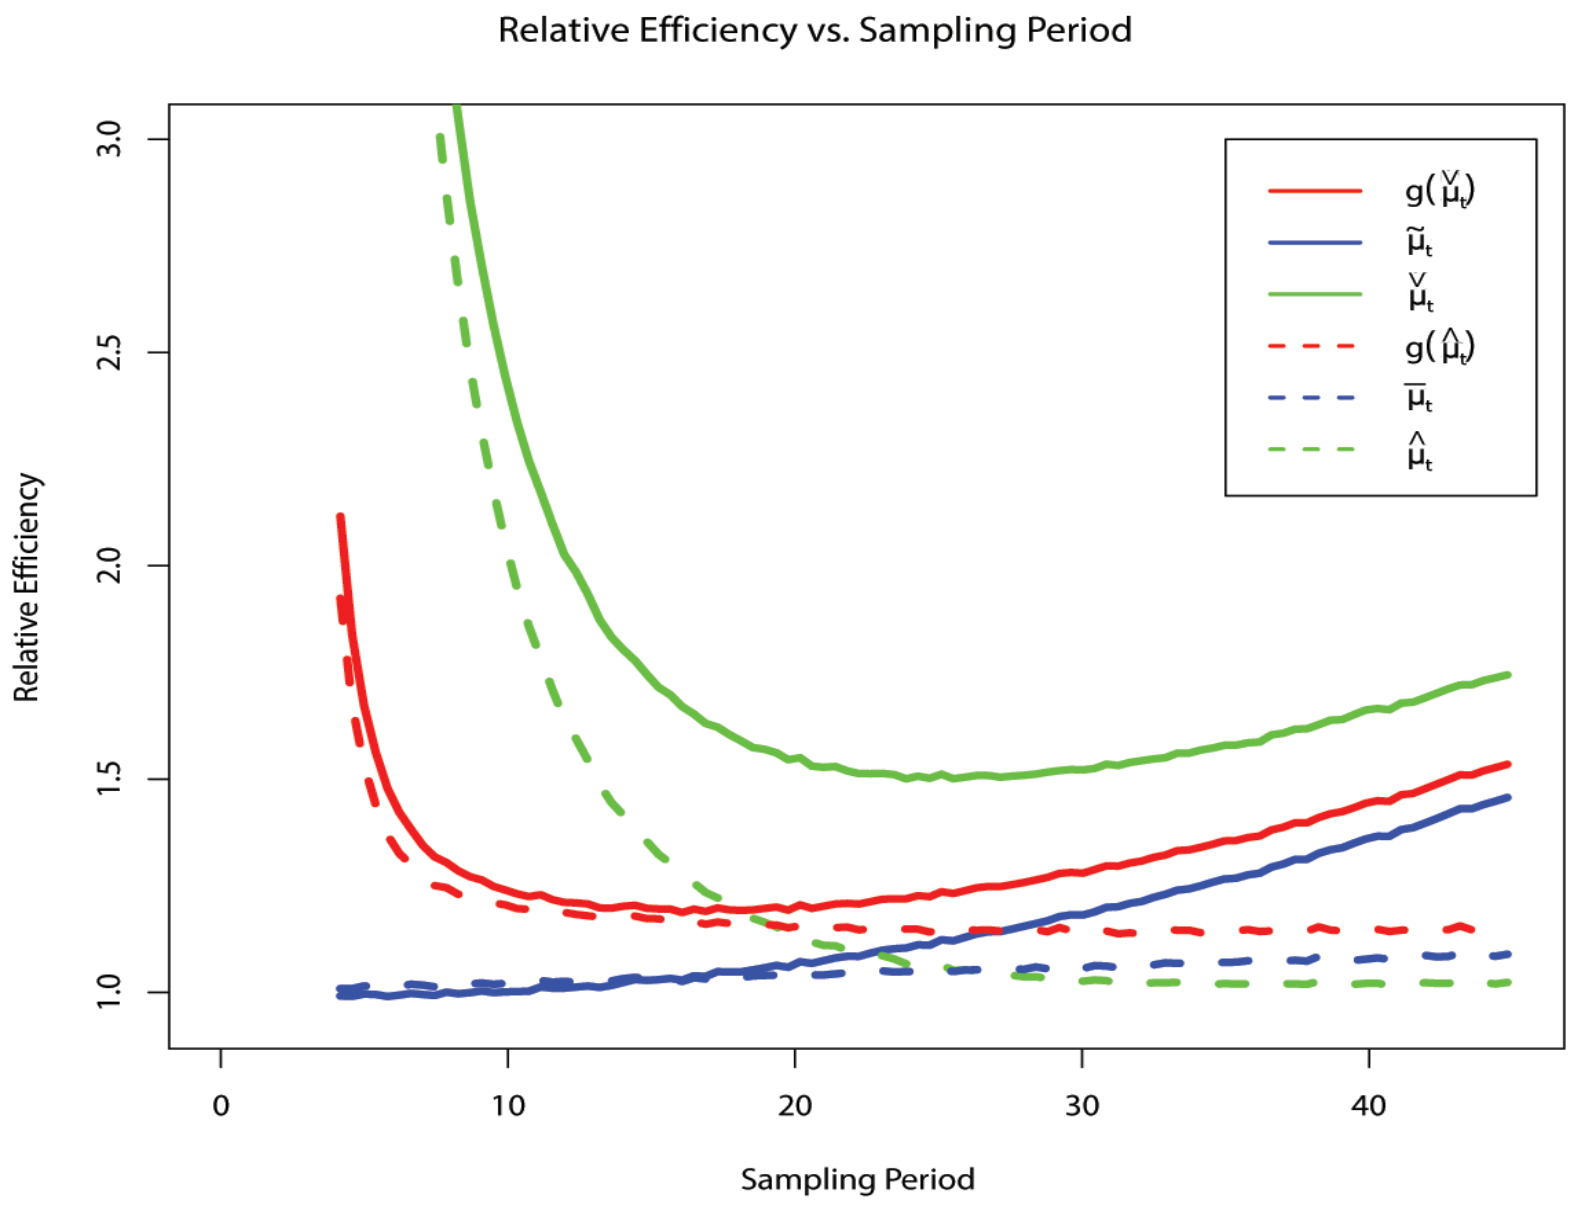

Fig 1. *Relative efficiency against sampling period for each of the estimators in Table 1 in a curved Gaussian distribution. The horizon of observations is $t = 300$, the true mean is $\mu = 4$ and the variance $\sigma^2 = 4\mu^2$. The computations are based on simulation experiments.*

Estimator	Formula	Distribution	Overshoots	Sampling Times	Optimal Rate
$\bar{\mu}_t$	$S_{\tau_{N_t}}/\tau_{N_t}$	no	yes	yes	$\delta << t$
$\tilde{\mu}_t$	$S_{\tau_{N_t}}/t$	no	yes	no	$\delta << \sqrt{t}$
$\hat{\mu}_t$	$N_t\Delta/\tau_{N_t}$	no	no	yes	$\sqrt{t} << \delta << t$
$\check{\mu}_t$	$N_t\Delta/t$	no	no	no	$\delta \sim \sqrt{t}$
$g(\hat{\mu}_t)$	$\hat{\mu}_t\left(1+\frac{\rho(\hat{\mu}_t)}{\Delta}\right)$	yes	no	yes	$t^{1/4} << \delta << t$
$g(\check{\mu}_t)$	$\check{\mu}_t\left(1+\frac{\rho(\check{\mu}_t)}{\Delta}\right)$	yes	no	no	$t^{1/4} << \delta << \sqrt{t}$

Table 1

Estimators of μ for sampling times given by (3.5). The first two rows also apply to more general sampling schemes. For each estimator, we report whether it requires knowledge of the random walk distribution, the overshoots (η_n), the sampling times (τ_n) and we specify the sampling rate for which its performance is optimized.

at a sequence of random times so that its increments are censored. We considered different estimators, which either ignore or approximate the unobserved overshoots, and we showed that they attain the asymptotic distribution of the sample mean for appropriate, *asymptotically low* sampling rates, under certain conditions on the random walk distribution. Our asymptotic results were supported by simulation experiments, which showed that it is always preferable to use the most recent sampling instance, instead of the current time, in the denominator of the estimator and that approximating, instead of ignoring, the unobserved overshoots can be very helpful when one wants to sample the process at a faster rate.

References

[1] Aït-Sahalia, Y. and Jacod, J. (2009). Testing for jumps in a discretely observed process, *Ann. Stat.* **37** 184–222.

[2] Aït-Sahalia, Y. and Jacod, J. (2011). Testing whether jumps have finite or infinite activity, *Ann. Stat.* **39** 1689–1719.

[3] Appadwedula, S., Veeravalli, V.V. and Jones, D.L. (2008) Decentralized detection with censoring sensors. *IEEE Trans. Sign. Process.* **56**(4) 40–77.

[4] Banerjee, T. and Veeravalli, V.V. (2012). Data-efficient quickest change detection with on-off observation control. *Seq. Anal.* **31** 40–77.

[5] Blanchet, J., and Glynn, P.(2006) Corrected diffusion approximations for the maximum of light-tailed random walk. *Ann. Appl. Probab.* **16** 952–983.

[6] Blum, R.S., Kassam, S.A. and Poor, H.V.(1997). Distributed detection with multiple sensors: Part II-Advanced topics, *Proceedings of the IEEE*, **85**(1) 64–79.

[7] Chang, J. T. (1992). On moments of the first ladder height of random walks with small drift. *Ann. Appl. Probab.* **2** 714-738.

[8] Chang, J. and Peres, Y. (1997) Ladder heights, Gaussian random walks and the Riemann zeta function. *Ann. Prob.* **25** 787–802.

[9] Coeurjolly, J.F. (2001). Estimating the parameters of a fractional Brownian motion by discrete variations of its sample paths, *Stat. Inf. for Stoch. Proc.*, **4** 199–227.

[10] Fellouris, G. and Moustakides, G.V. (2011). Decentralized sequential hypothesis testing using asynchronous communication. *IEEE Trans. Inform. Theory*, **57**(1) 534–548.

[11] Fellouris, G. and Moustakides, G.V. (2012). Decentralized sequential change detection. *Preprint*.

[12] Fellouris, G.(2012). Asymptotically optimal parameter estimation under communication constraints. *Ann. Stat.* **40**(4) 2239-2265

[13] Florescu, I. , Mariani, C. and Viens, F.G. (Eds.) *Handbook of Modeling High Frequency Data in Finance*. Publisher: World Scientific Publishing Co Pte Ltd.

[14] Foresti, G.L., Regazzoni, C.S. and P.K. Varshney, P.K. (Eds.) (2003). *Multisensor surveillance systems: The fusion perspective*, Kluwer Academic Publishers.

[15] Gut, A. (1974) On the moments and limit distributions of some first passage times. *Ann. Probab.* **2** 277-308.

[16] Gut, A. (2008). *Stopped Random Walks, Second Edition*, Springer.

[17] Lorden, G. (1970). On excess over the boundary, *Ann. Math. Stat.* **41**(2) 520–527.

[18] Martinsek, A.T. (1981). A note on the variance and higher central moments of the stopping time of an SPRT. *J. Amer. Statist. Assoc.*, **55** 660–663.

[19] Rabi, M., Moustakides, G. V. and Baras, J. S. (2012). Adaptive sampling for linear state estimation. *SIAM J. Control Optim.* **50** 672-702.

[20] Raghunathan, V., Schurgers, C., Park, S. and Srivastava, M.B. (2002). Energy-aware wireless microsensor networks. IEEE Sig. Proc. Mag. 19(2) 40–50.

[21] Rago, C. , Willett, P. and Bar-Shalom, Y. (1996) Censoring sensors: A low-communication-rate scheme for distributed detection. *IEEE Trans. Aerosp. Electron. Syst.*, **32**(2) 554-568.

[22] Ross, S.M. (1996). *Stochastic Processes, Second Edition.* Wiley.

[23] Siegmund, D. (1979). Corrected diffusion approximations in certain random walk problems. *Adv. in Applied Prob.* **11** 701–719.

[24] Siegmund, D. (1985). Sequential Analysis, Tests and Confidence Intervals. Springer-Verlag, New York.

[25] Stone, C.J. (1965). On characteristic functions and renewal theory. *Trans. Amer. Math. Soc.* **120** 327-342.

[26] Stone, C.J. (1965). On moment generating functions and renewal theory. *Ann. Math. Stat.* **36** 1298-1301.

[27] Tudor, C. and Viens, F.G. (2009). Variations and estimators for selfsimilarity parameter through Malliavin calculus. *Ann. Prob.* **37**(6) 2093–2134

[28] Veeravalli, V.V. (1999). Sequential Decision Fusion: Theory and Appli-

cations, *J. Franklin Inst.*, **336** 301–322.

[29] Viswanathan, R. and Varshney, R.K. (1997). Distributed detection with multiple sensors: Part II-Fundamentals, *Proceedings of the IEEE*, **85**(1) 54–63.

[30] Woodroofe, M. (1982). *Nonlinear Renewal Theory in Sequential Analysis.* SIAM, Philadelphia.

[31] Zhang, L., Mykland, P. and Aït-Sahalia, Y.(2005) A tale of two time scales: determining integrated volatility with noisy high-frequency data. *Journal of the American Statistical Association* **100** 1394-1411.